# EVERLIGHT EVERLIGHT ELECTRONICS CO., LTD.

# **Technical Data Sheet**

# **Chip LED with Right Angle Lens**

### Features

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.

### Descriptions

- The 27-21 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

## Applications

- Automotive: backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

## **Device Selection Guide**


Part No.	Material	<b>Emitted Color</b>	Lens Color
27-21/S2C-FP1Q1L/3C	AlGaInP	Brilliant Orange	Water Clear



27-21/S2C-FP1Q1L/3C



#### **Package Outline Dimensions**

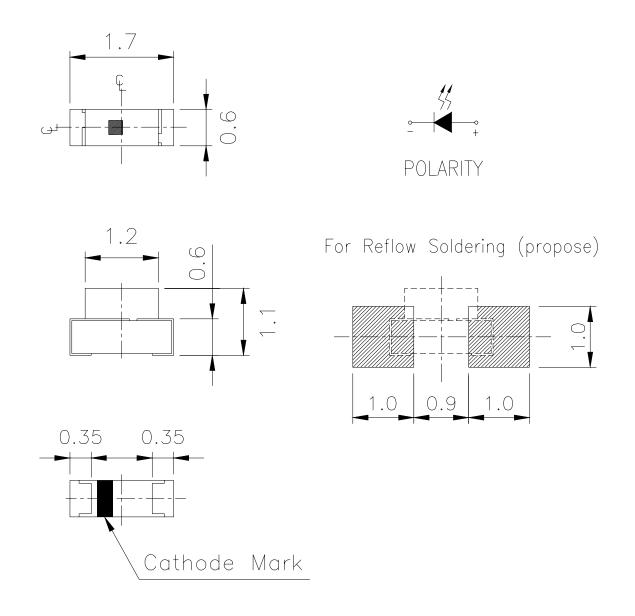



EVERLIGHT ELECTRONICS CO.,LTD.

## 27-21/S2C-FP1Q1L/3C

## Absolute Maximum Ratings (Ta=25°C)

EVERLIGHT

Parameter	Symbol	Rating	Unit	
Reverse Voltage	VR	5	V	
Forward Current	IF	25	mA	
Operating Temperature	Topr	-40 ~ +85	°C	
Storage Temperature	Tstg	-40 ~ +90	°C	
Soldering Temperature	Tsol	260 (for 5 seconds)	°C	
Electrostatic Discharge (HBM)	ESD	2000	V	
Power Dissipation	Pd	60	mW	
Peak Forward Current (Duty 1/10 @1KHz)	IFP	60	mA	
Soldering Temperature	Tsol	Reflow Soldering : 260 $^{\circ}$ C for 10 sec. Hand Soldering : 350 $^{\circ}$ C for 3 sec.		

EVERLIGHT ELECTRONICS CO.,LTD.

## 27-21/S2C-FP1Q1L/3C

Electro-Optical Characteristics (1a=25 C)							
Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition	
Luminous Intensity	Iv	45		90	mcd		
Peak Wavelength	λp		611		nm		
Dominant Wavelength	λd	603		609	nm	L 20 1	
Spectrum Radiation Bandwidth	Δλ		17		nm	IF=20mA	
Viewing Angle	2 <del>0</del> 1/2		130		deg		
Forward Voltage	VF	1.70		2.30	V		
Reverse Current	Ir			10	$\mu A$	V <sub>R</sub> =5V	

## Electro-Optical Characteristics (Ta=25°C)

EVERLIGHT

#### Notes:

1.Tolerance of Luminous Intensity ±10%

2.Tolerance of Dominant Wavelength ±1nm

3.Tolerance of Forward Voltage ±0.1V

EVERLIGHT ELECTRONICS CO.,LTD.

## 27-21/S2C-FP1Q1L/3C

#### **Bin Range Of Dom. Wavelength**

**EVERLIGHT** 

Group	Bin	Min	Max	Unit	Condition
F	EE1	603	606		I 20 A
	EE2	606	609	nm	IF=20mA

#### **Bin Range Of Luminous Intensity**

Bin	Min	Max	Unit	Condition
P1	45.0	57.0		
P2	57.0	72.0	mcd	IF=20mA
Q1	72.0	90.0		

#### **Bin Range Of Forward Voltage**

Group	Bin	Min	Max	Unit	Condition	
L	19	1.70	1.80			
	20	1.80	1.90	V	IF=20mA	
	21	1.90	2.00			
	22	2.00	2.10			
	23	2.10	2.20			
	24	2.20	2.30			

#### Notes:

1.Tolerance of Luminous Intensity ±10%

2.Tolerance of Dominant Wavelength ±1nm


3.Tolerance of Forward Voltage ±0.1V

EVERLIGHT ELECTRONICS CO., LTD.

## 27-21/S2C-FP1Q1L/3C

#### **Typical Electro-Optical Characteristics Curves**

**ÆRLIGHT** 

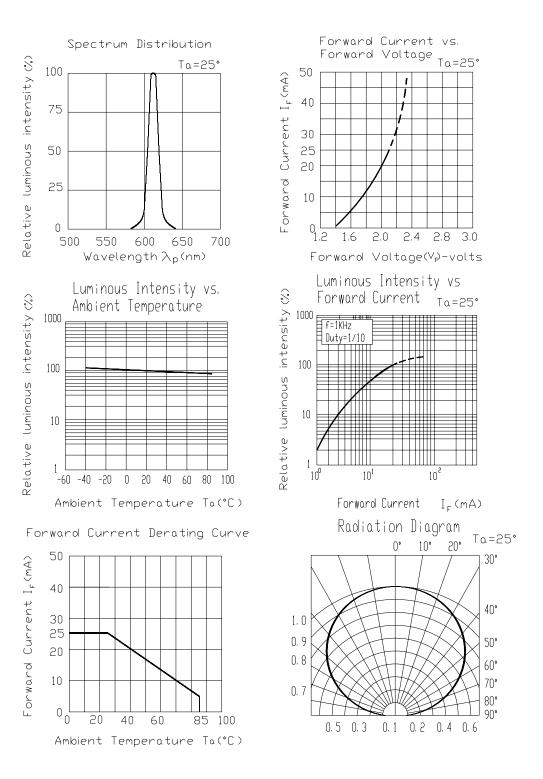


Everlight Electronics Co., Ltd. Device No:DSE-271-S01 http://www.everlight.com Prepared date: 19-Oct-2005 Rev 1Page: 6 of 11Prepared by: Ashley Kuo.

# EVERLIGHT EVERLIGHT ELECTRONICS CO.,LTD.


## 27-21/S2C-FP1Q1L/3C

#### Label explanation

- **CAT: Luminous Intensity Rank**
- HUE: Dom. Wavelength Rank
- **REF: Forward Voltage Rank**




#### **Reel Dimensions**

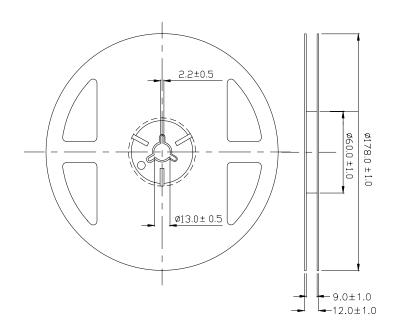

**Note:** The tolerances unless mentioned is  $\pm 0.1$  mm ,Unit = mm


http://www.everlight.com Prepared date: 19-Oct-2005

## **Carrier Tape Dimensions: Loaded quantity 3000 PCS per reel**

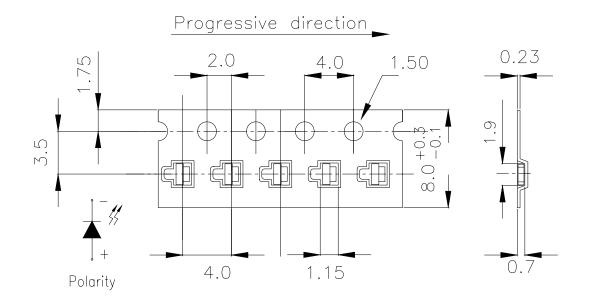

**Note:** The tolerances unless mentioned is  $\pm 0.1$  mm, Unit = mm

### **Moisture Resistant Packaging**

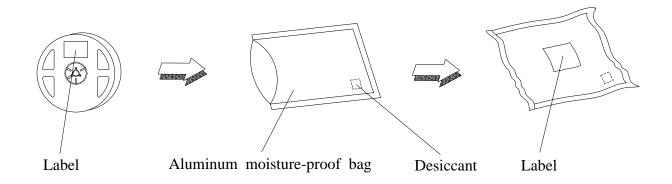

## **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below. Confidence level : 90%

LTPD: 10%

EVERLIGHT


No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	H : +100°C 15min ∫ 5 min L : -40°C 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H: +100°C 5min $\int 10 \sec$ L: -10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100℃	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	<b>Temp.</b> : -40°C	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85℃/ 85%RH	1000 Hrs.	22 PCS.	0/1

#### **Precautions For Use**

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change ( Burn out will happen ).

- 2. Storage
  - 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at  $30^{\circ}$ C or less and 90% RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30 deg C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.
  Baking treatment : 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

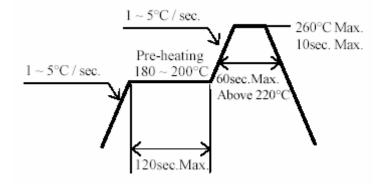

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

#### 4.Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than  $350^{\circ}$ C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

