# EVERLIGHT EVERLIGHT ELECTRONICS CO.,LTD.

#### **Technical Data Sheet**

### 1206 Package Chip LED (0.5mm Height)

### 15-215/Y5C-AP2R1L/2T

#### **Features**

- Package in 8mm tape on 7" diameter reel.
- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.
- The product itself will remain within RoHS compliant version.

#### **Descriptions**

- The 15-215 SMD Taping is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.

#### **Applications**

- Backlighting in dashboard and switch.
- Telecommunication: indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.


#### **Device Selection Guide**

D (N	(	I Cala	
Part No.	Material	<b>Emitted Color</b>	Lens Color
15-215/Y5C-AP2R1L/2T	AlGaInP	Briliant Yellow	Water Clear



Rev 1

### **Package Outline Dimensions**

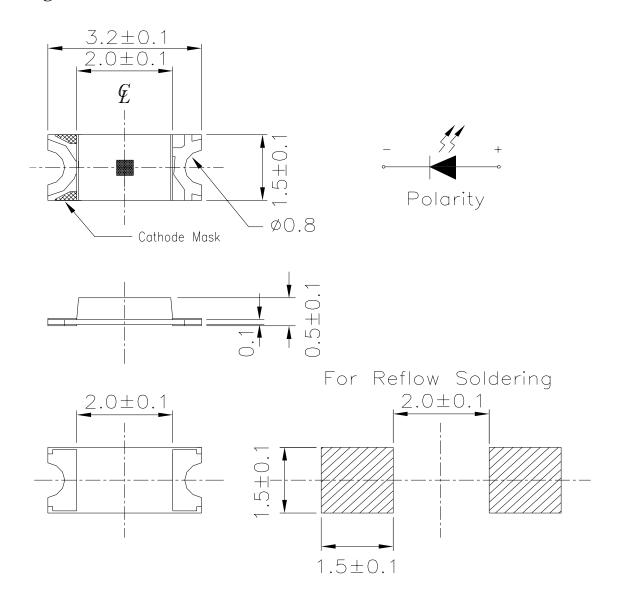

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm



# Absolute Maximum Ratings (Ta=25 $^{\circ}$ C)

Parameter	Symbol	Rating	Unit
Reverse Voltage	$V_R$	5	V
Forward Current	<b>I</b> F	25	mA
Peak Forward Current (Duty 1/10 @1KHz)	Ifp	60	mA
Power Dissipation	Pd	60	mW
Electrostatic Discharge(HBM)	ESD	2000	V
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\!\mathbb{C}$
Storage Temperature	Tstg	-40 ~ +90	$^{\circ}\!\mathbb{C}$
Soldering Temperature	Tsol	Reflow Soldering: 260 Hand Soldering: 350	

Everlight Electronics Co., Ltd. Device No:DSE-155-Y01 http://www.everlight.com Prepared date: 26-Dec-2006 Rev 1 Page: 3 of 11

Prepared by: Esther Yan



#### **Electro-Optical Characteristics (Ta=25°C)**

Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition
Luminous Intensity	Iv	57		140	mcd	
Viewing Angle	2 0 1/2		140		deg	
Peak Wavelength	λр		591		nm	
Dominant Wavelength	λd	585.5		594.5	nm	IF=20mA
Spectrum Radiation Bandwidth	Δλ		15		nm	
Forward Voltage	VF	1.7		2.3	V	
Reverse Current	Ir			10	μΑ	V <sub>R</sub> =5V

#### **Notes:**

- 1.Tolerance of Luminous Intensity ±11%
- 2.Tolerance of Dominant Wavelength ±1nm
- 3. Tolerance of Forward Voltage  $\pm 0.05V$

Everlight Electronics Co., Ltd. Device No:DSE-155-Y01

http://www.everlight.com

Prepared date: 26-Dec-2006 Prepared by: Esther Yan

Rev 1

Page: 4 of 11

#### Bin Range Of Dom. Wavelength

Group	Bin	Min	Max	Unit	Condition
A	D3	585.5	588.5		IF=20mA
	D4	588.5	591.5	nm	
	D5	591.5	594.5		

**Bin Range Of Luminous Intensity** 

Bin	Min	Max	Unit	Condition	
P2	57	72	mcd		
Q1	72	90		IF=20mA	
Q2	90	112			
R1	112	140			

**Bin Range Of Forward Voltage** 

Group	Bin	Min	Max	Unit	Condition
L	19	1.7	1.8	V	IF=20mA
	20	1.8	1.9		
	21	1.9	2.0		
	22	2.0	2.1		
	23	2.1	2.2		
	24	2.2	2.3		

#### **Notes:**

1. Tolerance of Luminous Intensity ±11%

2.Tolerance of Dominant Wavelength ±1nm

3. Tolerance of Forward Voltage ±0.05V

Everlight Electronics Co., Ltd. Device No:DSE-155-Y01

http://www.everlight.com

Prepared date: 26-Dec-2006

Rev 1

Prepared by: Esther Yan


Page: 5 of 11

Page: 6 of 11

Rev 1

Prepared by: Esther Yan

#### **Typical Electro-Optical Characteristics Curves**

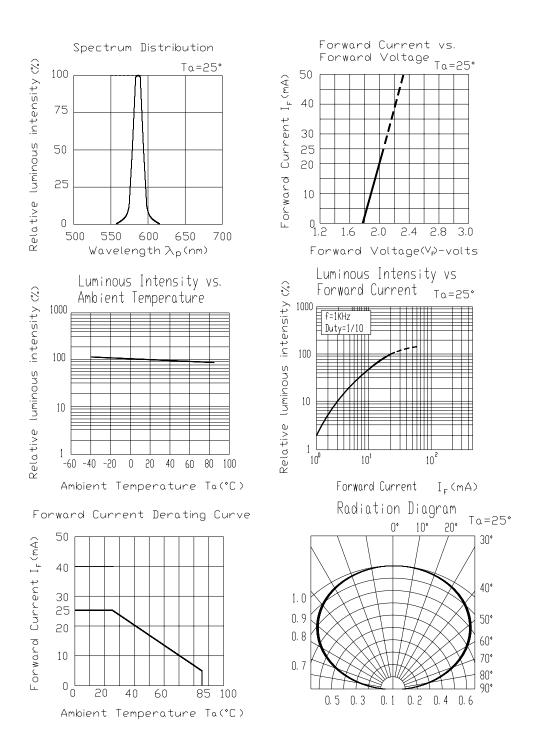

http://www.everlight.com

Prepared date: 26-Dec-2006

#### Label explanation


**CAT: Luminous Intensity Rank** 

**HUE: Dom. Wavelength Rank** 

**REF: Forward Voltage Rank** 




#### **Reel Dimensions**

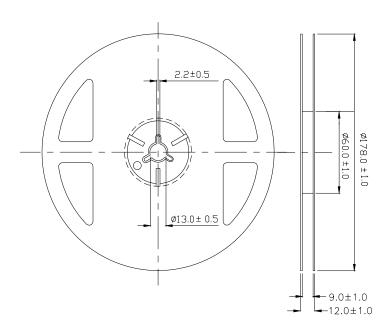


**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

### Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

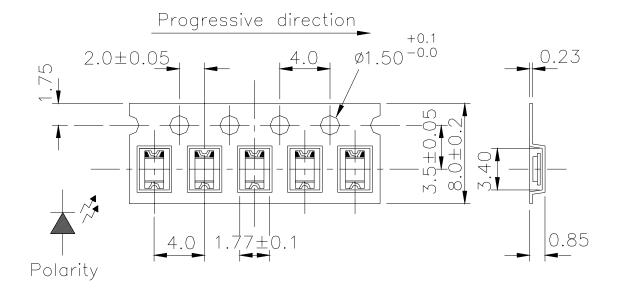

**Note:** The tolerances unless mentioned is  $\pm 0.1$ mm, Unit = mm

### **Moisture Resistant Packaging**

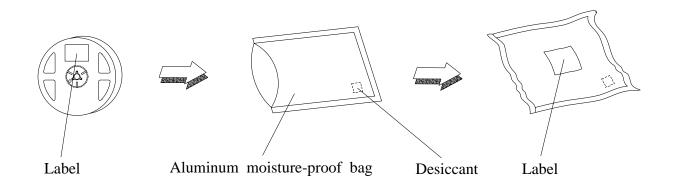

http://www.everlight.com

#### **Reliability Test Items And Conditions**

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min $\int 5 \text{ min}$ $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	$H: +100^{\circ}\mathbb{C}$ 5min $\int 10 \sec$ $L: -10^{\circ}\mathbb{C}$ 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°ℂ	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

Rev 1

Prepared by: Esther Yan

Page: 9 of 11

http://www.everlight.com


#### **Precautions For Use**

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change ( Burn out will happen ).

- 2. Storage
  - 2.1 Do not open moisture proof bag before the products are ready to use.
  - 2.2 Before opening the package: The LEDs should be kept at  $30^{\circ}$ C or less and 90%RH or less.
  - 2.3 After opening the package: The LED's floor life is 1 year under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
  - 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

    Baking treatment: 60±5°C for 24 hours.
  - 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

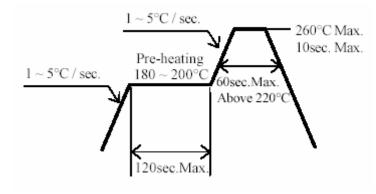

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd.

Device No:DSE-155-Y01

http://www.everlight.com

Prepared date: 26-Dec-2006 Pr

Rev 1 Page: 10 of 11

Prepared by: Esther Yan




#### 4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350°C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

#### 5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

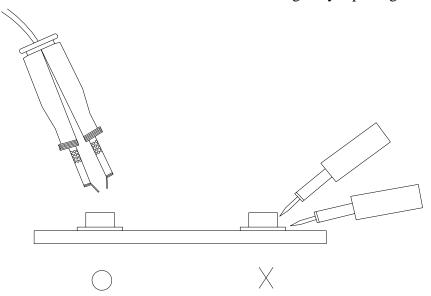

http://www.everlight.com

Prepared date: 26-Dec-2006

Rev 1

Prepared by: Esther Yan

Page: 11 of 11